



MP7,2-12

Nominal Voltage (V) 12V

Nominal Capacity

20hour rate (0.36A to 10.50V)	7.2Ah
10hour rate (0.72A to 10.50V)	7.2Ah
5hour rate (1.22A to 10.20V)	6.12Ah
1C (7.2A to 9.60V)	3.24Ah
3C (21.6A to 9.60V)	2.59Ah

Weight 2.678kg(5.91lbs.)

Internal Resistance (at 1KHz) 19 mΩ

Maximum Discharge Current for 30 seconds : 144A

Maximum Discharge Current for 5 seconds : 288A

Operating Temperature Range

Charge	0°C (32°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Charging Methods at 25°C (77°F)


Cycle use:
 Charging Voltage 14.4 to 15.0V
 Maximum Charging Current: 2.16A
Standby use:
 Float Charging Voltage 13.50 to 13.80V

Life expectancy :

Cycle Use:
 100% depth of discharge 200 cycles
 80% depth of discharge 225 cycles
 50% depth of discharge 500 cycles
Standby Use: 3-5 years


Case Material ABS UL94-VO FLAME RETARDANT CASE / COVER.

Terminal F1




mm(inch)

{FASTON TAB NO. 1B7}

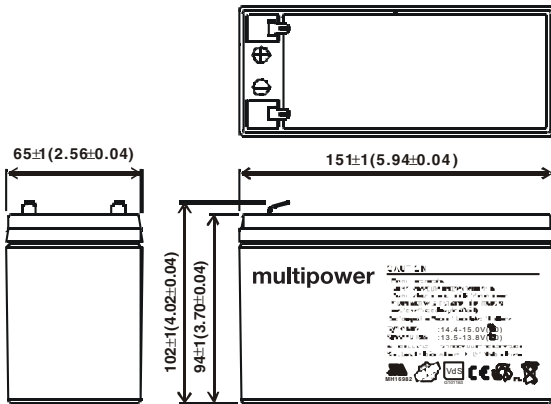

(v) FOR 12V BATTERY **Discharge Time VS. Discharge Current (25°C)**

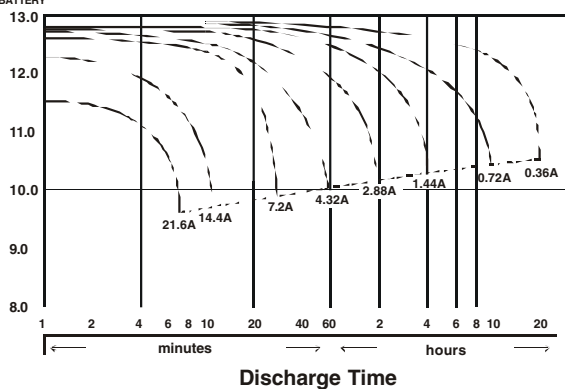

PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C

End Voltage Time	11.40V	11.10V	10.80V	10.50V	10.20V	9.90V	9.60V
1 min	400	480	520	545	565	580	600
2 min	340	360	385	410	440	465	490
3 min	285	320	360	390	405	415	425
5 min	215	245	255	280	305	330	345
7 min	184	213	240	246	254	262	270
10 min	157	177	195	208	217	224	227
15 min	130	143	154	161	167	170	172
20 min	112	123	130	135	138	139	141
30 min	87.3	94.5	100	103	104	105	106
60 min	54.0	58.2	60.5	61.4	61.9	62.3	62.3
90 min	40.5	43.1	44.4	45.0	45.3	45.4	45.4
120 min	32.1	34.3	35.4	35.8	36.1	36.1	36.1
180 min	23.1	24.5	25.2	25.5	25.7	25.7	25.7
240 min	18.3	19.4	19.9	20.1	20.2	20.2	20.3
300 min	15.2	16.1	16.6	16.8	16.8	16.9	16.9
360 min	13.1	13.9	14.3	14.4	14.5	14.5	14.6
480 min	10.4	11.0	11.3	11.4	11.5	11.5	11.5
600 min	8.53	9.10	9.36	9.46	9.51	9.54	9.56
1200 min	4.56	4.89	5.04	5.10	5.13	5.14	5.15

Discharge Rates in Amperes to Various End Voltages at 25°C

End Voltage Time	11.40V	11.10V	10.80V	10.50V	10.20V	9.90V	9.60V
1 min	31.5	38.0	43.8	48.8	51.9	55.4	57.8
2 min	27.6	32.2	36.9	40.8	44.5	46.4	48.7
3 min	24.4	28.6	32.1	36.0	38.0	39.9	42.0
5 min	20.4	23.5	26.5	28.7	30.2	31.5	33.4
10 min	15.0	17.1	18.6	19.7	20.5	21.0	21.3
15 min	12.0	13.3	14.4	15.1	15.6	15.8	15.9
20 min	10.0	11.1	11.9	12.4	12.6	12.7	12.8
25 min	8.68	9.52	10.1	10.4	10.6	10.7	10.8
30 min	7.66	8.40	8.81	9.10	9.24	9.32	9.35
35 min	6.86	7.48	7.84	8.08	8.20	8.27	8.27
45 min	5.66	6.18	6.46	6.63	6.69	6.70	6.75
60 min	4.44	4.83	5.07	5.18	5.22	5.25	5.28
90 min	3.09	3.37	3.52	3.59	3.62	3.64	3.65
120 min	2.44	2.62	2.73	2.77	2.79	2.80	2.82
180 min	1.75	1.86	1.92	1.95	1.97	1.97	1.98
240 min	1.38	1.45	1.50	1.52	1.53	1.54	1.55
300 min	1.15	1.20	1.24	1.26	1.26	1.27	1.27
480 min	0.78	0.81	0.82	0.84	0.84	0.84	0.85
600 min	0.65	0.67	0.68	0.69	0.69	0.70	0.70
1200 min	0.35	0.36	0.36	0.36	0.36	0.37	0.37